



BAKERLITE HI FLOW SAND FILTERS

THE NATURAL SOLUTION FOR
PERFECTLY FILTERED POOL WATER



45 - 47 Paul Matthews Road, Albany Auckland New Zealand
Phone: (09) 415 1499 Fax: (09) 415 1498
Email: filtermaster@xtra.co.nz Web: www.filtermaster.co.nz
FULLY NEW ZEALAND OWNED AND OPERATED



FEATURES

- Compact and heavy duty
- Made of high density Bakerlite
- Designed to suit most domestic swimming pools or spa pools
- Clamp lock is designed to allow 360 degree rotation to simplify installation
- Easy to use multi-port valve with simple to use lever action


FUNCTIONS: Refer to 6-Way Multi-port Valve

Maximum Working Pressure	250kPa/36psi/2.5bar
Factory Testing Pressure	400kPa/58psi/4.0bar
Size of Silica Sand	0.5-0.8mm
Maximum Filtration Velocity	50m ³ /h/m ²
Maximum Water Temperature	50°C (122°F)




TECHNICAL CHARACTERISTICS

Model No	Filter Area(m ²)	Valve Connections	Max Flow Rate	Sand(kg)
FMB 18	0.14	40 mm	150 lpm	40
FMB 20	0.20	40 mm	200 lpm	70
FMB 24	0.28	50 mm	300 lpm	125
FMB 28	0.36	50 mm	350 lpm	185
FMB 32	0.47	50 mm	412 lpm	320
FMB 36	0.61	50 mm	515 lpm	425

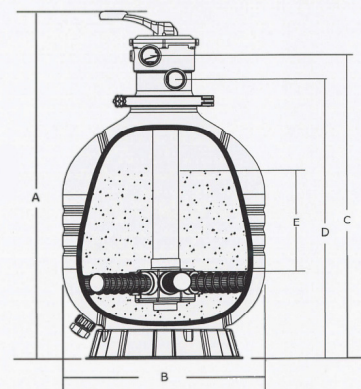

Model No	A mm	B mm	C mm	D mm	E mm
FMB 18	816	425	695	625	195
FMB 20	889	500	772	712	225
FMB 24	980	600	860	800	280
FMB 28	1133	675	976	910	300
FMB 32	1178	775	1021	955	370
FMB 36	1296	875	1139	1073	440

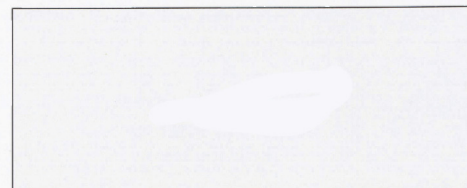

45 - 47 Paul Matthews Road, Albany Auckland New Zealand
 Phone: (09) 415 1499 Fax: (09) 415 1498
 Email: filtermaster@xtra.co.nz Web: www.filtermaster.co.nz
FULLY NEW ZEALAND OWNED AND OPERATED